
- (1) RED AND BLUE WIRES TO 2-WIRE CABLE, MATCH COLORS.
- WHERE NEEDED. 1 AT CONTROLLER,
  1 EVERY 300FT OR THE NEXT
  CLOSEST DECODER AND 1 AT THE
  END OF EACH TWO WIRE CABLE.
- (3) (5/8" x 8') COPPER GROUND ROD
- (4) YELLOW WIRES TO MASTER VALVE SOLENOID.
- (5) RED AND BLACK WIRES TO FLOW METER, MATCH COLORS.
- (6) MOUNTING HOLES MAY BE USED TO MOUNT DECODER TO VALVE BOX LID FOR SIDES.
- (7) CS-2W-POC DECODER
- (8) #6 BARE COPPER GROUND WIRE



## NOTES:

- . MAXIMUM 10FT OF 14 GAUGE WIRE FROM DECODER TO MASTER VALVE OR FLOW METER. IF WIRES NOT USED THE ENDS MUST BE WATER PROOF.
- 2. USE 3M SCOTCHCAST #3570G-N EPOXY PACKS FOR ALL WIRE SPLICES.

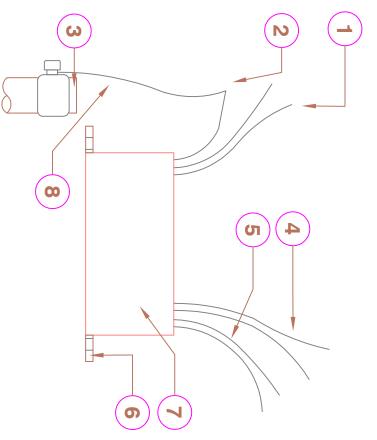

CALSENSE 2-STATION MODEL CS-2W-POC

DETAIL-FILE